


# Bandsaw blades for carpentry and hobbies



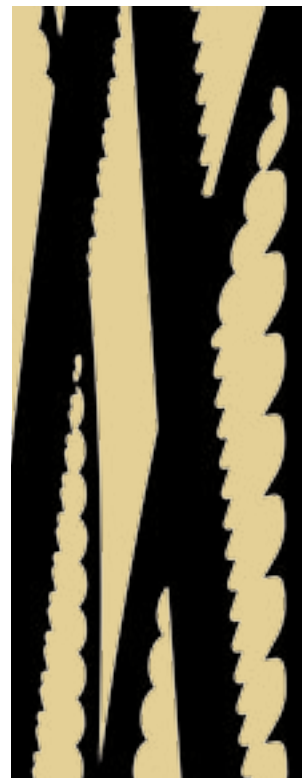

# The sharp choice for woodworking

Munkfors is a family-owned Swedish company that is truly involved with cutting-edge technology. We lead the development of bandsaw blades for the woodworking and sawmill industries that sharpen your performance to gain a more competitive edge.

## Unique profile-grinding technology

To produce the teeth of our top-quality blades that outperform most other brands, we use our own unique and patented profile-grinding method that gives:

- Sharper blades
- Cleaner cutting
- Longer blade lifetime
- Minimum downtime
- Very little material waste

## Many benefits in woodworking

The design, functionality and sharpness of our blades give you many benefits. They help to achieve your economic and product quality goals.

Industrial carpentry and hobby applications demand consistently straight cutting, a smooth and even surface finish to maintain tight design tolerances and minimize downstream processing, and uninterrupted production runs.

## Ordering details

When ordering Munkfors products always specify the product family, for example Bandsaw blades for carpentry and hobby, as well as the desired width, thickness and configuration, such as 16x0.60-3TPI.

Orders can be faxed to the number below, e-mailed to [mfsorder@munkfors.com](mailto:mfsorder@munkfors.com) or made online on our website.

## Bandsaw blades for carpentry and hobby

We supply tough high-performance bandsaw blades of different teeth configurations and manufactured from the best strip steel available to ensure they cut easily through different wood qualities and products.

### Tooth-hardened blades

Width mm	Thickness mm	Pitch
6	0.40	6TPI
6	0.60	4TPI
6	0.60	6TPI
10	0.40	6TPI
10	0.50	4TPI
10	0.50	6TPI
10	0.60	3TPI
10	0.60	4TPI
10	0.60	N6
12.5	0.50	4TPI
12.5	0.60	3TPI
12.5	0.60	4TPI
12.5	0.60	N6
16	0.40	6TPI
16	0.50	3TPI
16	0.50	4TPI
16	0.60	3TPI
16	0.60	4TPI
16	0.60	N8
16	0.63	3TPI
20	0.60	4TPI
20	0.70	N8
25	0.70	N10
30	0.70	N10

### Non tooth-hardened blades

Width mm	Thickness mm	Pitch
10	0.60	N6
12.5	0.60	N6
16	0.60	N8
20	0.70	N8
25	0.70	N10
30	0.70	N10
35	0.80	N10
35	0.80	N12
40	0.80	12mm
45	0.90	12mm



Sharpening your performance